


Type T3A 132S-6

Cod. R132S603,03A5A00000T

Mounting position

IM	B3
IM	1001

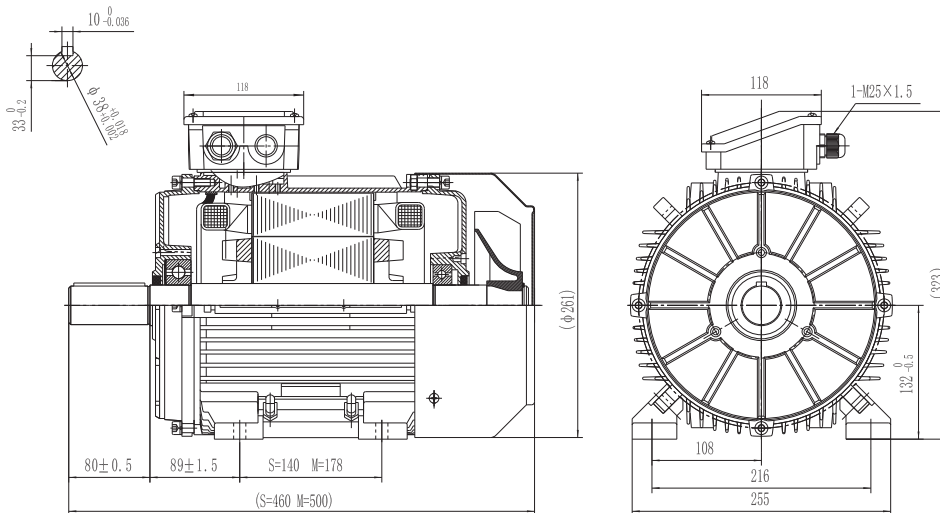

Electrical data			
Rated motor power	3		Kw
Rated motor speed	965		min <sup>-1</sup> 50Hz
	1160		min <sup>-1</sup> 60Hz
Rated motor frequency	50		Hz
Rated motor voltage(+/-10%)	230		VΔ/50Hz
	400		VY/50Hz
	280		VΔ/60Hz
	480		VY/60Hz
Rated motor torque	29.7		Nm (Mn)
	11.9	VΔ/50Hz	A (In)
Rated motor current	6.88	VY/50Hz	A (In)
	6		xIn
Starting motor torque	2		xMn
Breakdown motor torque	2.7		xMn
Starting			D.O.L.
Efficiency class	IE3		
Efficiency	50Hz	60Hz	
	85.6	85.8	100% load
	86	85.2	75% load
	85.1	84.5	50% load
Power factor cosφ	0.74	0.74	100% load

General data		
Frame size	132	
Mounting	B3	
Weight	36.4	Kg
Casing material	Aluminum	
Protection	IP	55
Insulation class	H	
Tropicalization	Yes	
Vibration class	A	
Duty	S1	
Direction of rotation	Bidirectional	
Method of cooling	IC	411
Cable entry	2-M25x1,5	
Standards	IEC/DIN/ISO/VDE/EN	
Execute at Standard	IEC 60034-1	
Feet removable	Yes	
Paintwork	RAL 7024	Standard
Thermal protections	n/a	

Site conditions	
Ambient temperature	from -20°C to +40°C
Altitude above sea level	1000 m

Mechanical data						
Noise level	LpA	58	dB(A)	Bearing DE side	6308-2RS-C3	
	LwA	67	dB(A)	Bearing NDE side	6208-2RS-C3	
Moment of inertia	0.0338		Kgm <sup>2</sup>	Average bearing lifetime	40000 h	
Bearings type			NSK	Relubrication interval L1 DE bearing	life h	
Lubricants for bearings	See installation and maintenance manual			Relubrication interval L1 NDE bearing	life h	
				Compensation ring		NDE SIDE standard

There may be differences between rating plate and calculated values.